

CONGESTION EFFECTS OF AUTONOMOUS TAXI FLEETS

Michał Maciejewski^{1,2}, Joschka Bischoff

¹*Division of Transport Systems, Poznan University of Technology, Piotrowo 3, 60-965 Poznan, Poland*

²*Transport Systems Planning and Transport Telematics, Technische Universität Berlin, Salzufer 17–19, 10587 Berlin, Germany*

Corresponding author: Michał Maciejewski, michal.maciejewski@put.poznan.pl, maciejewski@vsp.tu-berlin.de

Submitted 13 June 2016; accepted date

Abstract. Fleets of shared autonomous vehicles could replace private cars by providing a taxi-like service but at a cost similar to driving a private car. On the one hand, large autonomous taxi fleets may result in increased road capacity and lower demand for parking spaces. On the other hand, an increase in vehicle trips is very likely, as travelling becomes more convenient and affordable, and additionally, autonomous taxis need to drive unoccupied between requests. This study evaluates the impact of a city-wide introduction of autonomous taxis on traffic congestion. The analysis is based on a multi-agent transport simulation of Berlin and the neighbouring Brandenburg area. The central focus is on precise simulation of both real-time autonomous taxi operation and mixed autonomous/conventional vehicle traffic flow. Different ratios of replacing private car trips with autonomous taxi trips are used to estimate the possible effects at different stages of introducing such services. The obtained results suggest that large fleets operating in cities may have a positive effect on traffic if road capacity increases according to current predictions. Autonomous taxis will practically eliminate traffic congestion, even in the city centre, despite the increase in traffic volume. However, given no flow capacity improvement, such services cannot be introduced on a large scale, since the induced additional traffic volume will intensify today's congestion.

Keywords: autonomous vehicle, AV, autonomous taxi, taxi dispatching, traffic flow, queue model, large-scale simulation, MATSim.

Introduction

Autonomous vehicles (AVs) are often considered a solution to the current problems of providing convenient, safe, efficient and still affordable ways of travelling. There is a lot of speculation of how AVs will change people's travel behaviour and what will be the impact on today's transport systems. Although numerous studies have tried to roughly estimate the possible effects of introducing autonomous vehicles (Wadud et al., 2016; Litman, 2015), we are still far from having clear answers. However, it is beyond question that the possibility of relocating empty AVs will ease sharing them among many people. Because sharing private AVs on a small scale, within families or small circles of people, imposes the need of synchronisation among users, only large-scale autonomous taxi (AT) services can eliminate such constraints and allow taking full advantage of the AV technology.

AT services are aimed at combining advantages of different modes of transport, such as private car, shared car and taxi. From the traveller's point of view, they can be considered a taxi-like service but at a cost similar to driving a private car. On the fleet level, such services can help us greatly reduce the number of vehicles and parking spaces; nowadays private cars stay idle for almost the whole day. However, it remains unclear what impact AT fleets will have on traffic. Besides induced travel demand caused by higher accessibility and affordability, which is not dealt with in this study, large AT fleets may result in (a) increased road capacity resulting from high share of AVs, and (b) higher traffic volumes due to unoccupied drives between requests.

This study investigates how the increased capacity and higher volumes, both being direct effects of a city-wide introduction of ATs, will impact the overall traffic. The analysis is based on a multi-agent transport simulation of Berlin, the 3.5 million capital city of Germany, and the neighbouring Brandenburg area. The central focus is on precise simulation of both real-time AT operation and mixed autonomous/conventional vehicle traffic flow. We use MATSim (Horni et al., 2016a) to simulate a complete workday in Berlin with a high-detail disaggregated demand (individual travellers and their trips) and a large AT fleet being dispatched in real time in response to incoming events (such as request submission or vehicle arrival). The study covers different stages of the AT introduction, ranging between 0% and 100% of private car trips being converted into AT ones.

The study is built upon previous works on real-time taxi dispatching simulation and the case study of AT services in Berlin, referenced later in the paper. The contribution of this paper is as follows:

- We extended the queue model available in MATSim with AV vehicles, so that mixed traffic, consisting of autonomous and conventional vehicles can be simulated. This allowed us to run simulations for different shares of ATs and different levels of road capacity increase.
- We combined the standard user-optimum relaxation scheme available in MATSim with the system-optimum AT dispatching approach. By using long-term travel time averages for AT dispatching, we were able to avoid day-to-day oscillations and relatively quickly achieve a dynamic equilibrium.

- We ran large-scale simulations for different shares of AT trips and different road capacity increase levels and carried out a comprehensive comparison that included many different indicators measuring effects on congestion and the AT service itself. Even a moderate improvement of capacity turned out to be positive for both congestion reduction and AT service performance.

1. State of the Art

Recent research in autonomous vehicle development has been going on in several fields of science. On one hand, there is actual vehicle-based research, focussing on e.g. building autonomous vehicles and allowing them to collaborate via car to car and car2x communication, which plays a key role in improving overall traffic flow using AVs. On the other hand, there is plenty of research regarding the possible implications of AV availability on mobility patterns and habits of people.

In the first category, several studies suggest a significant improvement of traffic flow in many areas: During cruise, gaps between following vehicles may be as low as 0.3–0.5 seconds (Wagner, 2015). Taking into account a high penetration rate of cooperative and adaptive cruise control mechanism, the efficiency of such systems in high traffic density has also been demonstrated (van Arem et al., 2006). At intersections, the throughput of vehicles may be doubled using car2x technology. More precisely, a reservation system for intersections may significantly reduce waiting times (Fajardo et al., 2011).

In the second category, due to the easiness of sharing AVs, AT services are most likely to arise. Depending on the region and living circumstances, owning a vehicle may become far less attractive than it is today, or may even be restricted. In the US, operating costs for an AT system may be as low as 0.15\$ per mile (Burns and Scarborough, 2013). As to the question, how many conventionally driven vehicles (CDV) could be replaced by one AT, the numbers differ significantly depending on the operating scheme (shared / non-shared rides), the region involved and whether public transport is also replaced. In Lisbon, for instance, a single AT can replace up to ten cars if rides are shared and only six otherwise (Martinez, 2015). However, when also public transport is converted into AT services and ride sharing is not available, much larger AT fleets are necessary, and consequently the replacement ratios are 1:4 for Lisbon (Martinez, 2015) or even 1:3 for Singapore (Spieser et al., 2014). For the city of Berlin, the authors have conducted a study which indicates that a fleet of 100.000 vehicles is sufficient to serve the demand for private car trips during a weekday (Bischoff and Maciejewski, 2016a). With the introduction of AT services, total vehicle mileage generally increases. For the Berlin case, the majority of extra traffic is generated in the outskirts of the city, leading to the overall conclusion that restricting AT services to densely populated city centre areas is more efficient (Bischoff and Maciejewski, 2016b).

The interaction of ATs and CDVs has not yet been part of many research studies we are aware of. All of the aforementioned studies consider travel times and AT dynamics to be equal to those of CDV traffic and assume similar congestion patterns. That approach, however, may be too simplistic, especially in scenarios where the whole public transport system is replaced, inducing much higher traffic. A recent study by (Levin et al., 2016a) takes improved AV flow dynamics into account, however, the simulated scenario is limited in terms of size (only Austin's city centre) and spatial resolution (no intra-zonal trips). The results suggest twice as fast travel times during a morning peak using personal AVs and massive fleet reductions when sharing rides. A related problem of routing autonomous vehicles in a capacitated transport network has recently been addressed in (Zhang et al., 2016). The study proposes an approach to real-time congestion-aware routing and rebalancing based on a network flow model. The method has been validated on a road network model of Manhattan using, however, a simple volume-delay function for modelling travel times.

2. Methodology

2.1. MATSim

Multi-Agent Transport Simulation, MATSim (Horni et al., 2016a) is used to realistically simulate a large AT fleet together with normal traffic in the 3.5-million city of Berlin, Germany, where both types of participants try to optimise their performance given a limited flow capacity of the road network. MATSim combines a microscopic, disaggregated behavioural model of travellers with a mesoscopic queue-based traffic flow model and is capable of running large-scale simulations with millions of agents, e.g. (Erath et al., 2012) for Singapore.

The simulation is based on agents, which are equipped with (typically) day-long plans consisting of activities, such as home or work, and legs, where the mode and the route is defined. At the end of a day, plans are scored and, up to a certain point, modified for the next day (Horni et al., 2016b).

MATSim's traffic model is based on a queue model, which takes the flow capacity (throughput) and the storage capacity (equal to the length multiplied by the number of lanes) of a link in the network into account and moves vehicles according to the FIFO scheme along the link: A car entering a network link is added to the tail of the link's waiting queue, where it remains until the time required to drive along the link under free flow conditions has passed. It is then allowed to leave the link, if it is the first car in the waiting queue. The latter allows as many cars to leave a link per time step as the flow capacity of a link suggests. For example, a flow capacity of 1200 vehicles/hour would allow one car every three seconds to leave the link. Leaving a link is, however, only possible if the storage capacity of the next link allows entering it (Nagel et al., 2016). Each vehicle uses the amount of flow and storage capacity which corresponds to its length measured in PCUs (Passenger Car Units).

The queue model allows the simulation of millions of agents at high computational speeds. However, for analysis of traffic flow it brings certain limitations (compared to more sophisticated, but also far slower models like SUMO (Krajzewicz et al., 2012) or PTV Vissim, as cars in traffic are only tracked when entering and leaving a link and the only values that can be modified are aforementioned capacities. For this paper, the ability to compute large-scale scenarios was, however, found to be more important than the detail of the traffic flow simulation.

2.2. Simulation of mixed AV/CDV traffic

AVs are expected to increase road capacity; however, the actual improvement is hard to be precisely estimated. Recent studies suggest the improvement to be in the range of 1.5 and 2.0 for only-AV traffic, and in the case of mixed AV/CDV traffic, the relative improvement is expected to scale almost proportionally to the share of AVs (Wagner, 2015; Levin et al., 2016b; Friedrich, 2015). In other words, an AV consumes 1.5 to 2.0 times less of the nominal flow capacity, measured in PCUs per hour, compared to a CDV of the same size, though they both occupy the same amount of space. To model that phenomenon, we have extended the vehicle model in MATSim with the flow capacity consumption coefficient so that flow and storage capacity consumption can be specified independently at the vehicle level.

As a result, more flexible handling of a link's flow capacity is possible: If, in the aforementioned example, 1200 vehicles per hour are allowed to leave a link and all of them are CDVs, everything remains the same. If AVs only require half the amount of flow capacity of a CDV, 800 AVs travelling on the link during an hour would leave enough throughput for 800 additional CDVs. Thus, the actual flow capacity would be 1600. If only AVs travel the link during an hour, the capacity would increase to 2400 vehicles. Figure 1 provides an illustration of the modified queue model and the increased throughput for mixed AV/CDV flow.

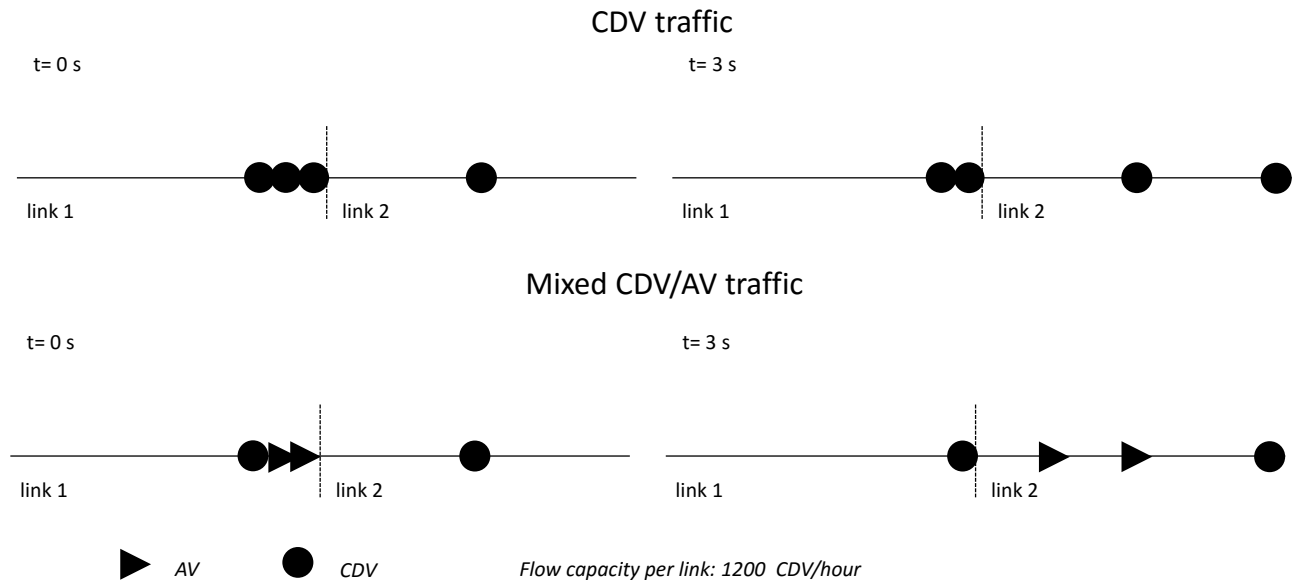


Figure 1. CDV and AV traffic dynamics in the adjusted Queue model for two links at different times. The upper part shows only CDVs traversing the link, whereas the lower part includes both CDVs and AVs resulting in an increased throughput. In this example, an AV consumes only half the flow capacity a CDV does.

The capacity increase of a link can be written more formally. Let a mixed AV/CDV flow have a share $s \in [0;1]$ of

AVs, each of them consuming only a fraction $c \in (0;1]$ of the amount of flow capacity consumed by a single CDV. Such a flow requires only a fraction $1 - s + sc$ of the amount of flow capacity required by an equally intense CDV-only flow. As a result, the flow capacity increase ratio equals $1/(1 - s + sc)$. The impact of both parameters on the effective flow capacity increase is illustrated in Figure 2.

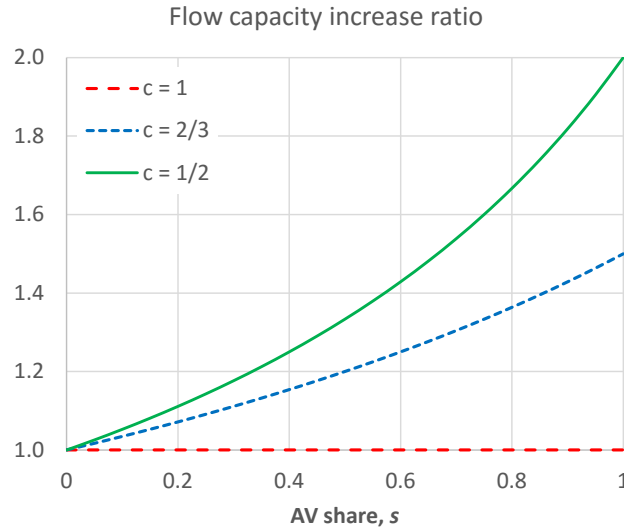


Figure 2. Flow capacity increase ratio of a link as a function of the AV share s for selected AV flow capacity consumption factors c .

2.3. Simulation of AT services

Simulation of dynamic transport services in MATSim is handled by the DVRP (Dynamic Vehicle Routing Problem) module (Maciejewski, 2016) that allows dynamic scheduling and routing of a fleet of vehicles in response to the current and anticipated demand. Quite recently, MATSim has been extended with a taxi module that offers many strategies for real-time dispatching of large taxi fleets (Maciejewski et al., 2016). The module has been already applied to simulate a 250,000 strong AT fleet in Berlin (Bischoff and Maciejewski, 2016a). In this study, we use a simple yet very efficient and scalable rule-based strategy that handles undersupply and oversupply differently in order to balance demand and supply. Typically, as long as there is at least one idle taxi, the nearest one is sent to each incoming request in order to minimise the passenger wait time. However, when all taxis are busy, all awaiting requests are stored, and once one of taxis becomes idle, it is sent to the nearest request, trying to maximize the system's throughput, which in turn, leads to minimisation of the average wait time.

2.4. Simulation Scenario

A multi-modal MATSim scenario for Berlin has been used in several case studies and real-world transport planning (Neumann 2014; Kaddoura, 2015). Its synthetic population depicts a typical workday in Berlin and the surrounding state of Brandenburg. Besides the full (100%) scenario, which consists of roughly 6 million agents, other fractional (e.g. 10%, 25%) scenarios are often used. In this study, we use the 10% scenario, which is the most widely used.

Because the study explores the influence of Berlin-wide AT services on traffic flow, the scenario was adapted so that only private car trips that start and/or end within the city area are taken into account, which makes up 508,670 trips, out of which 278,507 take place entirely within the city boundaries (Bischoff and Maciejewski, 2016a). Computational experiments were conducted for six different replacement rates (0%, 20%, ..., 100%), where the rate defines the fraction of intra-city private car trips being converted into AT trips (cf. to Table 1). According to (Bischoff and Maciejewski, 2016b), a fleet of 11,000 AVs, each available 24 hours a day, is sufficient to serve all the private car trips while experiencing only a short period of undersupply during the afternoon peak. For smaller replacement rates, the fleet size is scaled down proportionally, for example, 2,200 AVs are used when only 20% of intra-city private car trips are converted into AT ones. The initial spatial distribution of ATs follows Berlin's population distribution.

Table 1. Replacement rate of car trips by AT mode and corresponding fleet sizes

Replacement rate [%]	AT trips	AT fleet
0	0	0
20	55,701	2,200
40	111,403	4,400
60	167,104	6,600
80	222,806	8,800
100	278,507	11,000

Each computational experiment consists of 51 iterations, each being a simulation of a weekday day. In iteration 0, all private car trips are routed (shortest path search) according to the link travel times obtained with the original 10% scenario. In iterations 1–40, random 10% of private car trips are re-routed based on the link travel times from the previous iteration, which is aimed at reaching a dynamic equilibrium. In the last 10 iteration, private car routes are fixed. This is a standard approach in MATSim. However, during all 51 iterations, ATs are dispatched always along the shortest path, which can lead to day-to-day oscillations when the link travel times are taken only from the previous day. In order to prevent that and reach an equilibrium, travel times used for AT dispatching are determined by applying an exponential moving average (over travel times observed over a series of iterations) with a relatively low degree of weighting decrease ($\alpha = 0.05$). This approach could be extended with short-term on-line travel time prediction techniques proposed by (Hoerl, 2016).

Because traffic flow is simulated for the 10% scenario, the link flow and storage capacities are multiplied by 0.15 and 0.3, respectively. The reasons behind not using 0.1 scaling factors are twofold: the travel demand is around 11% (not 10%) of that in the full scenario, and secondly, granularity of traffic flow prevents simple linear capacity downscaling, in particular for smaller links. Although AVs are expected to improve traffic flow, the scale of improvement still remains an open question. Therefore, computations were carried out for three levels of capacity increase given an AV-only flow ($s = 1$), namely 1.0 (no improvement; $c = 1$), 1.5 ($c = 2/3$), and 2.0 (twofold increase; $c = 1/2$), all three presented in Figure 2. While referring to specific simulation cases (scenario variations), we often use abbreviations that combine the applied replacement rate and the capacity increase level, for example “0%” (no ATs) or “100% 1.0” (all intra-city trips handled by ATs and no improvement in AV flow dynamics).

In order to speed up computations, the nearest open request or idle vehicles is found with multi-node Dijkstra search out of the 20 nearest (in a straight line) open request or idle vehicles, respectively. Each pickup takes 2 minutes and each drop-off 1 minute.

Computations were run in parallel (one simulation experiment per physical core) on a computer with a 6-core Intel Core i7-3930K processor (12 logical cores) and 64GB RAM. Each iteration consisted mainly of the following two phases: re-planning (including re-routing of 10% private car trips; up to iteration 40), which took on average between 250 and 400 seconds, and simulation (of both traffic flow and AT dispatching), which required from 400 (the 0% case, when only traffic is simulated) to 2000 seconds (100% 1.0).

3. Results

3.1. Traffic congestion

To assess the impact of the AT service on traffic congestion, we calculated the average travel time for all intra-city trips beginning in a given time period (e.g. hour or day), excluding empty drives made by ATs. This indicator allows for comprehensive assessment of the total impact on intra-city travellers, regardless of the mode chosen. In order to compare the level of congestion at any hour, we also calculated delay ratios, defined as the average travel delay (the difference between the actual and free-flow travel times) to the average free-flow (uncongested) travel time. Table 2 shows the indicator values obtained for the afternoon peak hour (3–4 pm) and the whole day. Figure 3a compares hourly delay ratios over the day for selected scenario variations, whereas Figure 3b illustrates the afternoon peak hour ratios for all variations.

The differences in delays between analysed cases are especially noticeable during peak hours and at high replacement rates. While the results for the 20% replacement rate are close to the 0% case, regardless of the capacity increase level, the full replacement of private cars with ATs leads to significant changes in traffic. In the latter case, when there is no increase in road capacity, additional empty taxi trips induce significant congestion. However, the capacity increase level of 1.5 more than compensates for unoccupied taxi travel. This level of flow

improvement is enough to reduce traffic congestion. Further increase of the factor does not bring substantial changes.

It should be noted that the calculated delay ratios are underestimated, and seem moderate even in the most extreme case (100%, 1.0). Firstly, in real life, vehicles typically move faster in free flow than the allowed maximal speed, which is not taken into account in this study. Secondly, Berlin is not as heavily congested as other cities of similar size.

Another look at traffic situation is provided by daily profiles of the number of vehicles driving in the network. Figure 4a shows profiles generated for all vehicles, whereas Figure 4b refers only to vehicles on intra-city trips (including both empty and occupied AT drives). Globally, there is not so much difference between the illustrated scenario variations, as many trips incoming to and outgoing from Berlin are spread over a larger area, and thus, remain unaffected by the AT fleet. However, taking only vehicles on inner-city trips into account gives more insight into the places where traffic is most intensive, such as the city centre. Serving all intra-city trips by AT increases the number of vehicles in the network by around two thousand because of empty drives between consecutive taxi requests. However, this effect is limited by the fleet size: around 3:00 pm up to ten thousands of ATs are driving in the network while the remaining one thousand is picking up and dropping off passengers.

Despite the additional mileage triggered by dispatch of empty taxis, the increase in flow capacity, particularly of those links which are often traversed by AVs, significantly lowers congestion. The dotted green curve in both charts represents the normalised number of vehicles in the network, where each AT is counted as 0.5 CDVs, which approximates the network-wide demand for flow capacity in the “100% 2.0” scenario variation. At the opposite extreme, serving all inner city trips with ATs given no increase in road capacity, leads to severe traffic congestion resulting in the afternoon peak being extended by additional two hours.

Because AT operation is concentrated within the city centre, this is also the area which is impacted most by the introduction of ATs. A deeper insight into a spatial effects is given in Figure 5 that shows differences in the peak-hour link speed ratios (defined as the ratio of peak-hour to free-flow speed) between the no AT (0%) case and the full replacement with no AV flow improvement (100%, 1.0) case. A relative drop in speed of up to 80% can be noticed on links in the city centre, marking a significant increase in congestion. This is mainly an issue on arterial roads and parts of the circular motorway. Because of stochasticity, some links are also less congested (marked in green).

Table 2 Mean travel time and delay ratio for all intra-city trips (excluding empty taxi drives)

replacement rate [%]	capacity increase level	3:00 – 4:00 pm		all day	
		travel time [s]	delay ratio [%]	travel time [s]	delay ratio [%]
free flow		703	–	716	–
0	–	799	13.8	763	6.5
20	1.0	814	15.8	767	7.1
	1.5	790	12.5	759	6.0
	2.0	784	11.5	756	5.6
40	1.0	832	18.4	772	7.8
	1.5	782	11.3	756	5.5
	2.0	770	9.5	750	4.8
60	1.0	865	23.1	780	8.9
	1.5	777	10.6	753	5.1
	2.0	759	8.0	745	4.1
80	1.0	920	31.0	797	11.2
	1.5	772	9.9	750	4.8
	2.0	750	6.7	741	3.4
100	1.0	1056	50.3	828	15.7
	1.5	771	9.7	749	4.5
	2.0	741	5.4	736	2.8

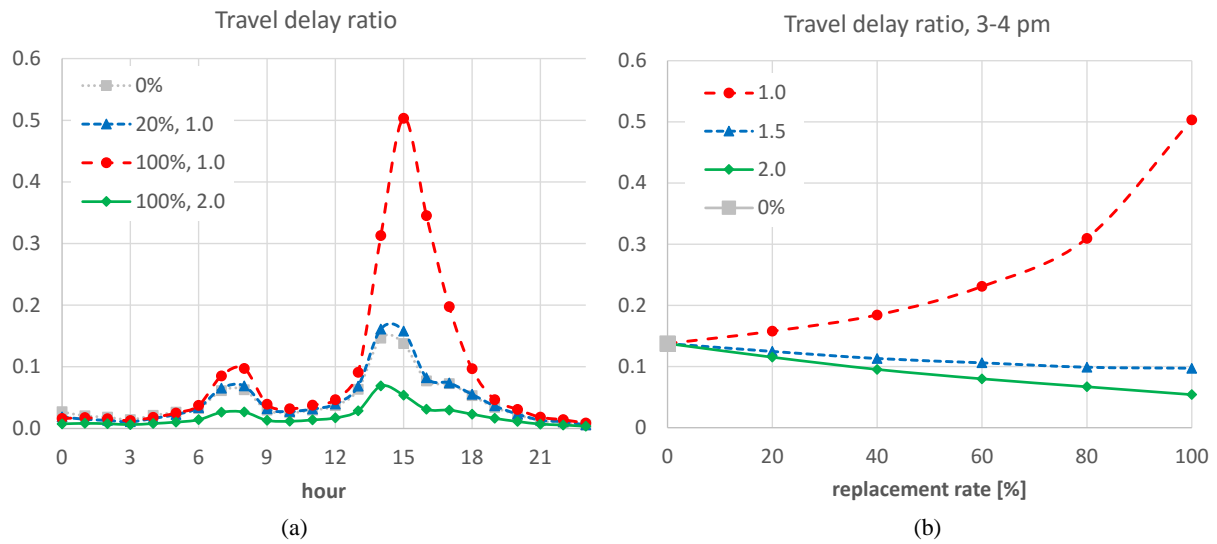


Figure 3. Travel delay ratios: (a) hourly averages for selected simulation cases, (b) peak-hour averages extrapolated to the 0% replacement case (grey point)

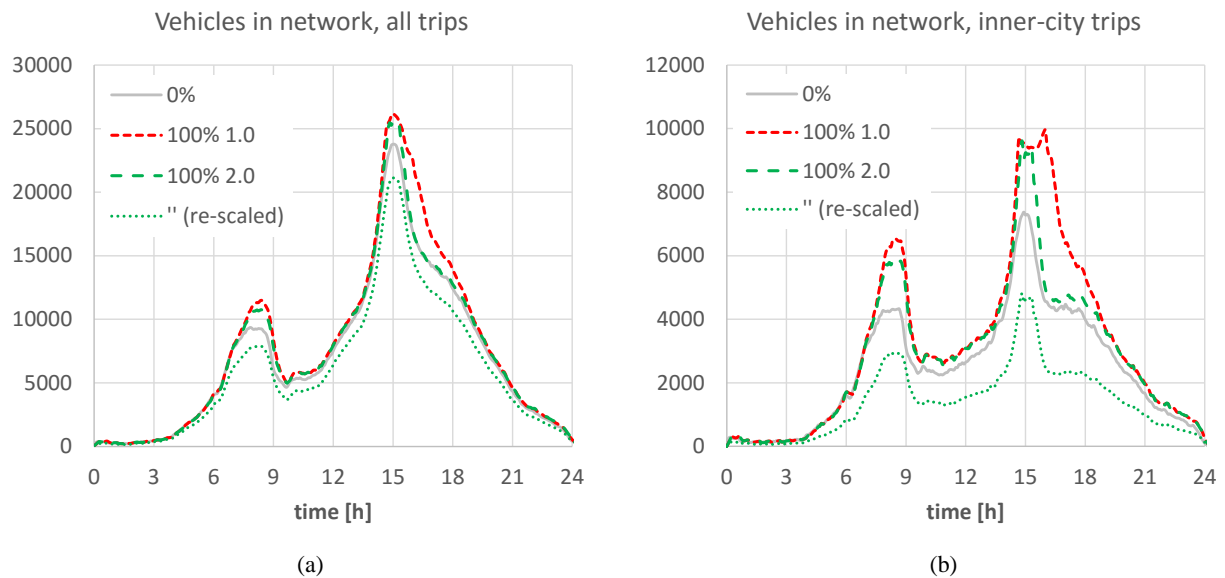


Figure 4. Number of vehicles driving in the network: (a) all trips, (b) intra-city trips. The dotted green curve is a re-scaled 100% 2.0 series, where each AV is counted as 0.5 CDVs to adjust for their reduced flow capacity consumption.

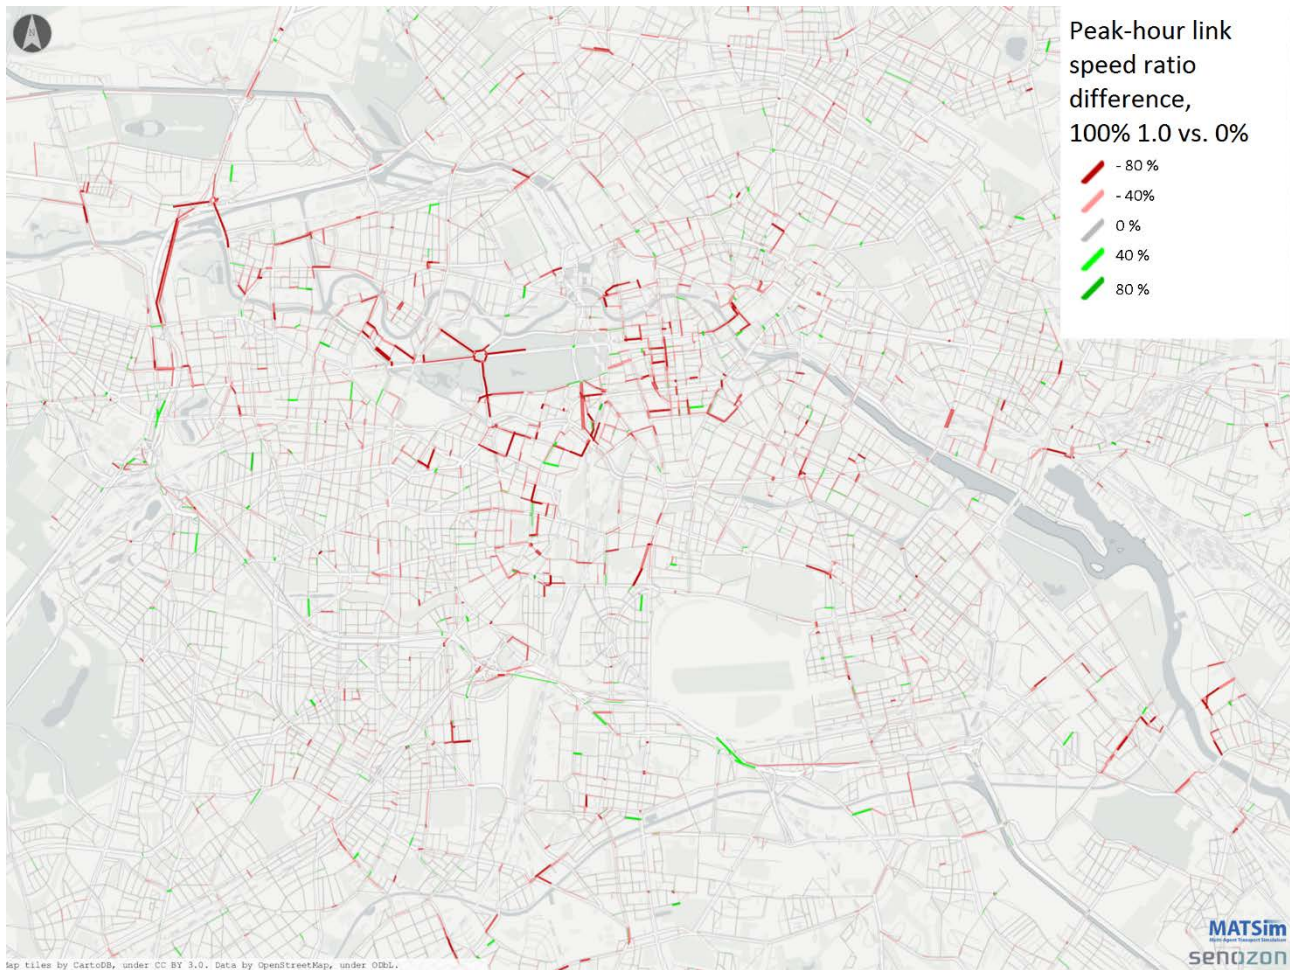


Figure 5. Differences in the link speed ratios on links during the pm peak hour between the full replacement with no AV flow improvement (100%, 1.0) case and the no AT (0%) case. Additional empty rides result in an overall decrease of network speed, marked in red.

3.2. AT service performance

Performance of the AT service can be assessed from different points of view. Passengers want a high quality service (e.g. low waiting times), but at the same time, the dispatcher wants to minimise operation costs (e.g. a low empty to total drive time ratio for short-term planning, or a small fleet size for long-term planning). Table 3 and Figures 6–8 show selected results obtained for the following three measures: the average passenger wait time for trips starting within a given period, the average AT utilisation rate in a given period, and the average vehicle-wise (as opposed to trip-wise) empty to total drive time ratio over a given period. Since the fleet size was fixed, the utilisation rate is used not as a service performance indicator, but only to assess the impact of traffic on AT operation.

Analysis of taxi service performance during the afternoon peak gives a clear view on the AT service under congestion. If the AV flow is assumed to be identical to the CDV flow (the capacity increase level of 1.0), the best peak-hour performance (the lowest passenger wait time and AT utilisation rate) is obtained for the 40% replacement rate, which is a trade-off between having a larger (effect of scale resulting in shortening empty drives) or smaller fleet (less congestion due to fewer empty drives). On the opposite pole, once AV flow dynamics is improved (the capacity increase levels of 1.5 and 2.0), the overall traffic gets more fluid, which in turns significantly increases the AT service performance, becoming highest at the 100% replacement rate. All in all, higher capacity more than compensates extra traffic generated by empty drives.

The only performance measure that does not depend so much on traffic condition and is mostly impacted by the fleet size (effect of scale) is the empty drive ratio. Intuitively, one could expect higher empty trip ratios in congested scenarios because fewer vehicles remain available for dispatch, causing them to travel longer distances to reach customers. However, when the systems runs into undersupply, the dispatching strategy actually starts minimising empty drive time, as opposed to minimising passenger wait time during oversupply.

Table 3 AT fleet performance

replacement rate [%]	capacity increase level	passenger wait time [s]		AT utilisation rate [%]		AT empty drive ratio [%]	
		3–4 pm	all day	3–4 pm	all day	3–4 pm	all day
20	1.0	334	190	95.5	31.6	22.6	18.8
	1.5	281	183	92.6	31.2	20.4	18.6
	2.0	286	182	92.5	31.2	21.8	18.7
40	1.0	285	186	93.9	31.5	16.7	17.7
	1.5	230	174	89.4	30.9	16.9	17.8
	2.0	218	172	88.0	30.8	16.8	17.8
60	1.0	314	185	96.7	31.5	16.9	17.0
	1.5	214	166	89.3	30.6	16.6	17.1
	2.0	191	161	86.7	30.4	16.1	17.1
80	1.0	374	195	98.5	32.0	17.6	16.9
	1.5	196	163	88.4	30.5	15.9	16.9
	2.0	167	156	84.8	30.1	15.3	16.9
100	1.0	483	212	99.9	33.1	15.9	16.8
	1.5	194	163	89.1	30.4	16.9	16.9
	2.0	153	153	83.9	29.9	15.0	16.7

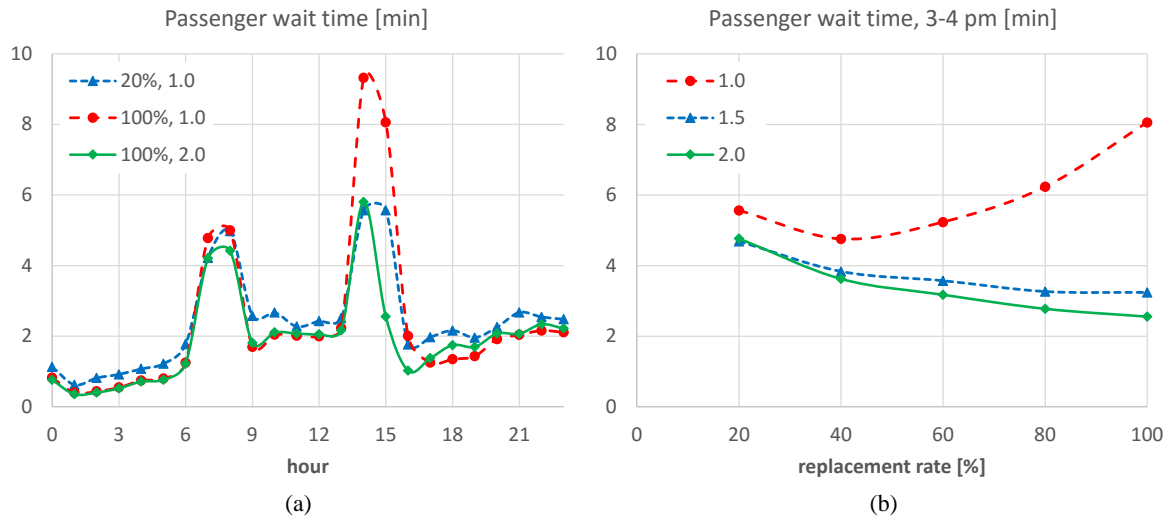


Figure 6. Passenger wait times: (a) hourly averages for selected simulation cases, (b) peak-hour averages.

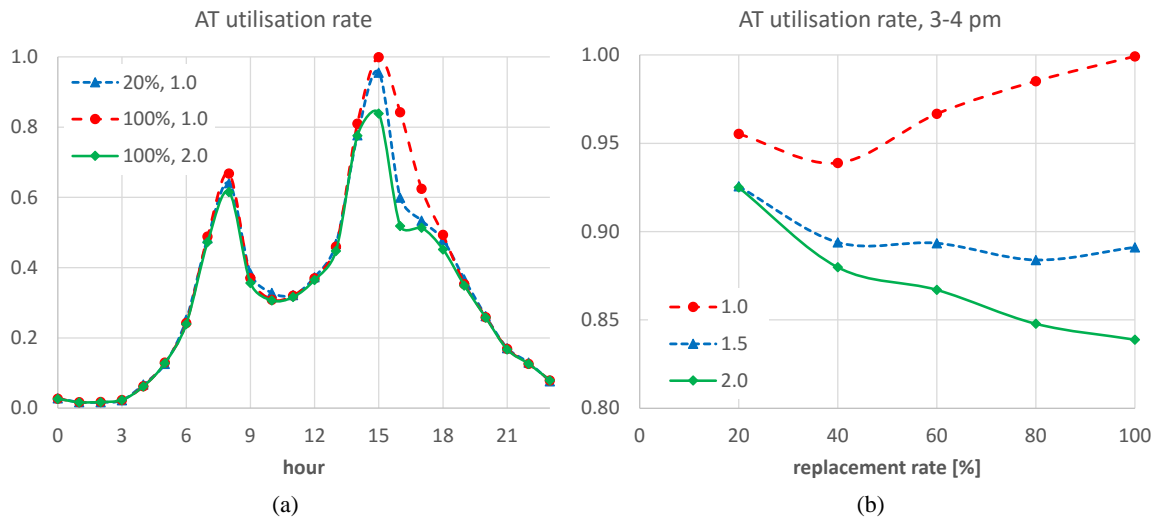


Figure 7. AT utilisation rates: (a) hourly averages for selected simulation cases, (b) peak-hour averages.

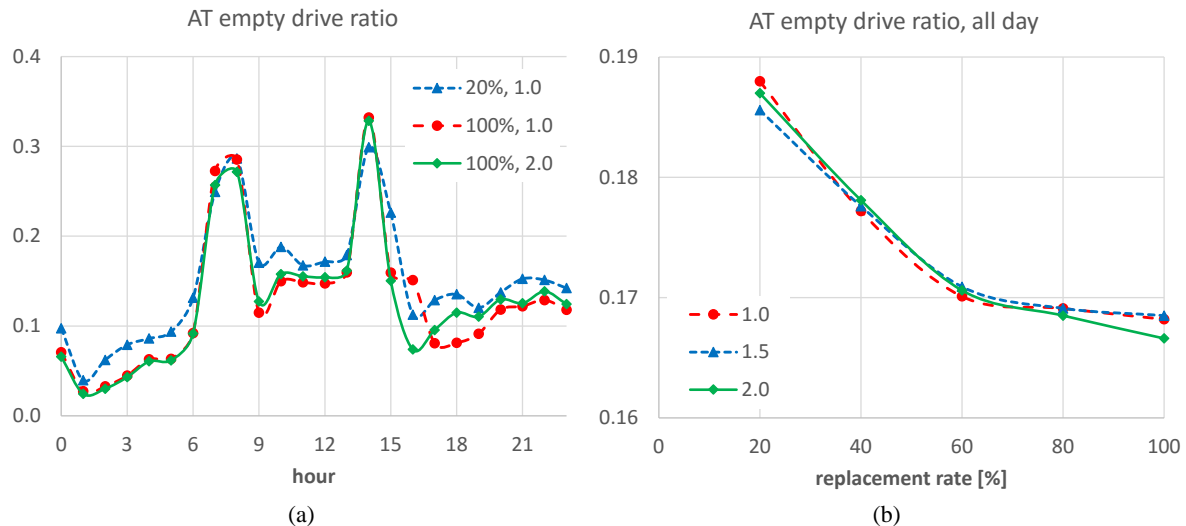


Figure 8. AT empty drive ratios: (a) hourly averages for selected simulation cases, (b) daily averages.

Conclusions

The obtained results suggest that operating large AT fleets in cities may have a positive effect on traffic. Even the moderate AV flow capacity increase of 1.5, which is a quite low estimate given the state-of-the-art predictions, leads to practically uncongested traffic despite higher traffic volumes. AT operation is especially beneficial in the congested city centre, where empty mileage is relatively low due to high density of the AT demand and supply. While moving away from the centre, ATs generate more empty taxi traffic and the overall impact is less substantial, yet still positive. However, if AVs do not effect in higher road capacity, AT services cannot be introduced on a large scale, as that would lead to even heavier congestion in urban areas. Because the effects of capacity increase are variable in space and time, it is hard to approximate a border-line value of the capacity increase level that would balance out the negative impact of empty trips. This question requires further computational experiments. Also a possible improvement of CDVs, e.g. by (retro-)fitting some of the features of AVs such as platooning, should be looked at closer.

The transition phase, with only few ATs operative and a majority of CDVs remaining in the city, will not trigger significantly more congestion even if road capacity remains at the same level. However, a smaller AT fleet will result in a poorer dispatch performance due to higher empty mileage. For that period, a smaller operation area, such as the city centre, may be worth considering.

Empty AT traffic results in the overall traffic volume increase. Ride sharing could be a way to reduce this effect, especially during high peak periods in the city centre. Another potential benefit of ride sharing is a smaller AT fleet, which is sized for the peak demand and remains rather idle for most of the day. Yet, it is unclear in how far ride sharing is accepted by current car users and it is certainly not a solution when AT demand is low, especially in sparsely populated areas and at night. In this case, combining public transport with ATs serving last-mile trips is likely an approach to follow. These two issues of sharing rides and integration with public transport, should be addressed in future studies.

References

- Bischoff, J.; Maciejewski, M. 2016a. Simulation of City-wide Replacement of Private Cars with Autonomous Taxis in Berlin, *Procedia Computer Science*, 2016, 83, 237 – 244, doi:10.1016/j.procs.2016.04.121
- Bischoff, J.; Maciejewski, M. 2016b. Autonomous taxicabs in Berlin - a spatiotemporal analysis of service performance, presented at *mobil.TUM 2016*, also vsp-wp 16-07, available online: <http://www.vsp.tu-berlin.de/publications/vspwp/>
- Burns, L.D.; Scarborough, B.A. 2013. Transforming Personal Mobility. Tech. Rep.; The Earth Institute of Columbia University
- Erath, A.; Chakirov, A.; Fourie, P. J.; Ordóñez, S. A.; Medina, M.; Shah, M.; van Eggermond, A. B.; Axhausen, K.W.. 2012 A large-scale agent-based transport travel demand model for Singapore: The implementation of MATSim, *Working Paper*, Future Cities Laboratory, Singapore-ETH Centre (SEC), Singapore
- Fajardo, D.; Au, T.; Waller, T.; Stone, P., and Yang, D. 2011. Automated Intersection Control: Performance of a Future Innovation Versus Current Traffic Signal Control. *Transportation Research Record (TRR)*, 2259:223–32

- Friedrich, B. 2015. Verkehrliche Wirkung autonomer Fahrzeuge, in Maurer, M.; Gerdes, C.; Lenz, B.; Winner, H. (Eds.). *Autonomes Fahren* pp.331–350 doi: 10.1007/978-3-662-45854-9_16.
- Hörl, S.; Implementation of an autonomous taxi service in a multi-modal traffic simulation using MATSim. Master thesis, Chalmers University of Technology, Gothenburg, 2016.
- Horni, A.; Nagel, K.; Axhausen, K.W. (eds.) 2016a. The Multi-Agent Transport Simulation MATSim, Ubiquity, London. Available online: <http://matsim.org/the-book>
- Horni, A.; Nagel, K.; Axhausen, K.W. 2016b. Introducing MATSim, in Horni et al. (Eds.), *The Multi-Agent Transport Simulation MATSim*, Ubiquity, London. Available online: <http://matsim.org/the-book>
- Kaddoura, I. 2015. Marginal congestion cost pricing in a multi-agent simulation: Investigation of the greater Berlin area, *Journal of Transport Economics and Policy*, 49(4):560–578
- Kickhöfer, B.; Hosse, D.; Turner, K.; Tirachini, A. 2016. Creating an open MATSim scenario from open data: The case of Santiago de Chile, *VSP Working Paper*, 16-02, TU Berlin, Transport Systems Planning and Transport Telematics, available online: <http://www.vsp.tu-berlin.de/publications/vspwp/>
- Krajzewicz, D.; Erdmann, J.; Behrisch, M.; Bieker, L. 2012. Recent Development and Applications of SUMO - Simulation of Urban MObility, *International Journal On Advances in Systems and Measurements*, 5 (3&4):128-138.
- Levin, M.; Li, T.; Boyles, S.; Kockleman, K. 2016a. A general framework for modeling shared autonomous vehicles. Paper presented at the 95th Annual Meeting of the Transportation Research Board.
- Levin, M. W.; Boyles, S. D. 2016b. A multiclass cell transmission model for shared human and autonomous vehicle roads, *Transportation Research Part C: Emerging Technologies*, 2016, 62, 103 – 116
- Litman, T. 2015. Autonomous Vehicle Implementation Predictions, Tech. Rep., *Victoria Transport Policy Institute*, available online: <http://www.vtpi.org/avip.pdf>
- Maciejewski, M., 2016. Dynamic Transport Services, in Horni et al. (Eds.), *The Multi-Agent Transport Simulation MATSim*, Ubiquity, London. Available online: <http://matsim.org/the-book>
- Maciejewski, M.; Bischoff, J.; Nagel, K. 2016. An Assignment-Based Approach to Efficient Real-Time City-Scale Taxi Dispatching, *IEEE Intelligent Systems*, vol.31, no. 1, pp. 68-77, Jan.-Feb. 2016, doi:10.1109/MIS.2016.2
- Martinez, L. 2015. Urban Mobility System Upgrade – How shared self-driving cars could change city traffic. Tech. Rep., International Transport Forum, available online: http://www.itf-oecd.org/sites/default/files/docs/15cpb_self-drivingcars.pdf.
- Nagel, K.; Rieser, M.; Horni, A. MATSim Data Containers, in Horni et al. (Eds.), *The Multi-Agent Transport Simulation MATSim*, Ubiquity, London. Available online: <http://matsim.org/the-book>
- Neumann, A. 2014. A paratransit-inspired evolutionary process for public transit network design. Ph.D. thesis, Technische Universität Berlin
- Spieser, K.; Treleaven, K.; Zhang, R.M.; Frazzoli, E.; Morton, D.; Pavone, M. 2014. Toward a systematic approach to the design and evaluation of automated mobility-on-demand systems: A case study in Singapore. In: *Road Vehicle Automation*. Springer; 2014, p. 229–245. Available online: <http://hdl.handle.net/1721.1/82904>
- van Arem, B.; van Driel, C. J. G.; and Visser, R. 2006. The Impact of Cooperative Adaptive Cruise Control on Traffic-Flow Characteristics, in *IEEE Transactions on Intelligent Transportation Systems*, vol. 7, no. 4, pp. 429-436, doi: 10.1109/TITS.2006.884615
- Wadud, Z.; MacKenzie, D.; Leiby, P. 2016. Help or hindrance? The travel, energy and carbon impacts of highly automated vehicles, *Transportation Research Part A: Policy and Practice*, 2016, 86, 1-18
- Wagner, P., 2015. Traffic Control and Traffic Management in a Transportation System with Autonomous Vehicles, in Maurer, M.; Gerdes, C.; Lenz, B.; Winner, H. (Eds.). *Autonomes Fahren* pp.313–330 doi: 10.1007/978-3-662-45854-9_15
- Zhang, R.M.; Rossi, F.; Pavone, M. 2016. Routing Autonomous Vehicles in Congested Transportation Networks: Structural Properties and Coordination Algorithms, in *Proceedings of Robotics: Science and Systems*, Ann Arbor, Michigan, USA, doi: 10.15607/RSS.2016.XII.032